

# Self-Propelled Scissor Lifts

## GS™ -2032, GS-2632 & GS-3232

### Specifications

| Models                                  | GS-2032     |        | GS-2632     |        | GS-3232      |         |
|---|-------------|--------|-------------|--------|--------------|---------|
| Measurements                            | US          | Metric | US          | Metric | US           | Metric  |
| Working height maximum*                 | 26 ft       | 8.10 m | 32 ft       | 9.92 m | 38 ft        | 11.75 m |
| <b>A</b> Platform height maximum        | 20 ft       | 6.10 m | 26 ft       | 7.92 m | 32 ft        | 9.75 m  |
| <b>B</b> Platform height stowed         | 3 ft 4.5 in | 1.03 m | 3 ft 9.5 in | 1.16 m | 4 ft 2.75 in | 1.29 m  |
| <b>C</b> Platform length - outside      | 7 ft 5 in   | 2.26 m | 7 ft 5 in   | 2.26 m | 7 ft 5 in    | 2.26 m  |
| extended                                | 10 ft 5 in  | 3.18 m | 10 ft 5 in  | 3.18 m | 10 ft 5 in   | 3.18 m  |
| Slide-out platform extension deck       | 3 ft        | .91 m  | 3 ft        | .91 m  | 3 ft         | .91 m   |
| <b>D</b> Platform width - outside       | 2 ft 8 in   | .81 m  | 2 ft 8 in   | .81 m  | 2 ft 8 in    | .81 m   |
| Guardrail height: fixed rails           | 3 ft 3 in   | .99 m  | —           | —      | —            | —       |
| fold down rails (CE)                    | 3 ft 7 in   | 1.10 m | 3 ft 7 in   | 1.10 m | 3 ft 7 in    | 1.10 m  |
| Toeboard height                         | 6 in        | .15 m  | 6 in        | .15 m  | 6 in         | .15 m   |
| <b>E</b> Height - stowed                |             |        |             |        |              |         |
| fixed rails                             | 6 ft 8 in   | 2.03 m | —           | —      | —            | —       |
| folding guardrails (CE)                 | 7 ft        | 2.13 m | 7 ft 5 in   | 2.26 m | 8 ft         | 2.43 m  |
| rails folded                            | 5 ft 9 in   | 1.75 m | 6 ft 3 in   | 1.91 m | 6 ft 8 in    | 2.03 m  |
| <b>F</b> Length - stowed                | 8 ft        | 2.44 m | 8 ft        | 2.44 m | 8 ft         | 2.43 m  |
| Length - extended                       | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in  | 3.33 m  |
| <b>G</b> Width                          | 2 ft 8 in   | .81 m  | 2 ft 8 in   | .81 m  | 2 ft 8 in    | .81 m   |
| <b>H</b> Wheelbase                      | 6 ft 1 in   | 1.85 m | 6 ft 1 in   | 1.85 m | 6 ft 1 in    | 1.85 m  |
| <b>I</b> Ground clearance - center      | 3.5 in      | .09 m  | 3.5 in      | .09 m  | 3.5 in       | .09 m   |
| <b>J</b> - with pothole guards deployed | .75 in      | .02 m  | .75 in      | .02 m  | .75 in       | .02 m   |

### Productivity

|                              |                  |                 |                  |                 |                  |                 |
|------------------------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| Maximum platform occupancy** | 2                | 2               | 2                | 2               | 2                | 2               |
| Lift capacity                | 800 lbs          | 363 kg          | 500 lbs          | 227 kg          | 500 lbs          | 227 kg          |
| Extension deck capacity      | 250 lbs          | 113 kg          | 250 lbs          | 113 kg          | 250 lbs          | 113 kg          |
| Drive height                 | full height      |                 | full height      |                 | 22 ft            | 6.71 m          |
| Drive speed - stowed         | 2.2 mph          | 3.5 km/h        | 2.2 mph          | 3.5 km/h        | 2.2 mph          | 3.5 km/h        |
| Drive speed - raised         | 0.5 mph          | 0.8 km/h        | 0.5 mph          | 0.8 km/h        | 0.5 mph          | 0.8 km/h        |
| Gradeability - stowed***     | 30%              |                 | 25%              |                 | 25%              |                 |
| Maximum outrigger leveling:  |                  |                 |                  |                 |                  |                 |
| front to back                | —                | —               | —                | —               | 3°               |                 |
| Maximum outrigger leveling:  |                  |                 |                  |                 |                  |                 |
| side to side                 | —                | —               | —                | —               | 5°               |                 |
| Turning radius - inside      | zero             | zero            | zero             | zero            | zero             | zero            |
| Turning radius - outside     | 7 ft             | 2.13 m          | 7 ft             | 2.13 m          | 7 ft             | 2.13 m          |
| Raise / lower speed          | 30 / 34 sec      | 30 / 34 sec     | 30 / 40 sec      | 30 / 40 sec     | 57 / 40 sec      | 57 / 40 sec     |
| Controls proportional        | proportional     |                 | proportional     |                 |                  |                 |
| Drive                        | dual front wheel |                 | dual front wheel |                 | dual front wheel |                 |
| Multiple disc brakes         | dual rear wheel  |                 | dual rear wheel  |                 | dual rear wheel  |                 |
| Tires - solid non-marking    | 15 x 5 x 11 in   | 38 x 13 x 28 cm | 15 x 5 x 11 in   | 38 x 13 x 28 cm | 15 x 5 x 11 in   | 38 x 13 x 28 cm |

### Power



|                           |                                       |        |                                       |        |                                       |        |
|---------------------------|---------------------------------------|--------|---------------------------------------|--------|---------------------------------------|--------|
| Power source              | 24 V DC<br>(four 6V 225 Ah batteries) |        | 24 V DC<br>(four 6V 225 Ah batteries) |        | 24 V DC<br>(four 6V 225 Ah batteries) |        |
| Hydraulic system capacity | 3.75 gal                              | 14.2 L | 3.75 gal                              | 14.2 L | 3.75 gal                              | 14.2 L |

### Weight\*\*\*\*

|           |           |          |           |          |           |          |
|-----------|-----------|----------|-----------|----------|-----------|----------|
| ANSI, CSA | 3,574 lbs | 1,621 kg | 4,413 lbs | 2,002 kg | 5,185 lbs | 2,352 kg |
| CE, AUS   | 4,024 lbs | 1,825 kg | 4,313 lbs | 1,956 kg | 5,185 lbs | 2,352 kg |

### Standards Compliance ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* CE/AUS markets: GS-2632 and GS-3232 indoor use only. GS-2032 outdoor use-one person maximum occupancy.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

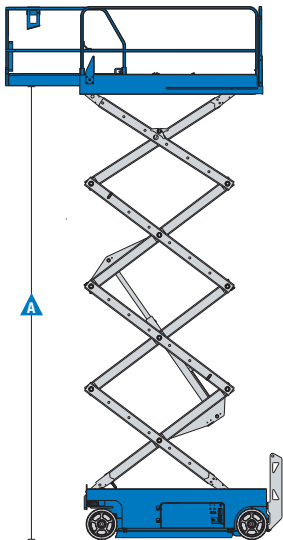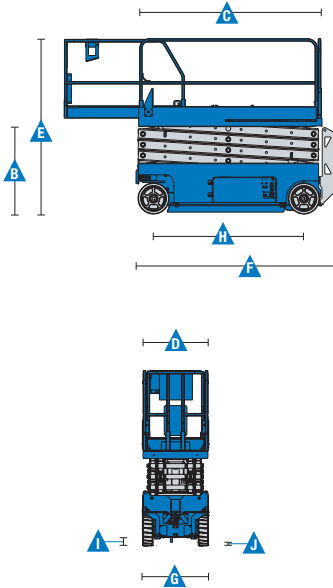

### Features

#### Standard Features

##### Measurements

###### GS-2032

- 26 ft (8.10 m) working height
- Up to 800 lbs (363 kg) lift capacity

###### GS-2632

- 32 ft (9.92 m) working height
- Up to 500 lbs (227 kg) lift capacity

###### GS-3232

- 38 ft (11.75 m) working height
- Up to 500 lbs (227 kg) lift capacity

##### Productivity

- 89 x 32 in (2.26 x .81 m) steel platform
- 36 in (.91 m) extension deck
- Fixed rail with chain entry gate (standard GS™-2032)
- Folding rails with half-height swing gate (standard on all CE, GS™-2632, GS™-3232)
- Automatic leveling outriggers (GS™-3232 only)
- Dual front wheel drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- SmartLink™ - 2 speed lift and proportional drive
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

##### Power

- 24 V DC (four 6 V 225 Ah batteries)

#### Options & Accessories

##### Productivity Options

- Folding rails with half-height swing gate (GS™-2032)
- Platform swing gate, half-height (GS™-2032)
- Air line to platform
- Dual flashing beacons
- Motion alarm
- Automotive horn
- Biodegradable hydraulic fluid

##### Power Options

- Power Inverter (120 V/60 Hz)
- EE rating
- AGM maintenance-free batteries



#### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By: