

This well-balanced light weight XP framing nailer packs plenty of power and won't leave you fatigued at the end of the day. Drives ring, screw, and smooth-shank clipped head nails. SENCORP tools are specifically engineered for demanding pros and demanding environments. Built with enhanced features and superior components – SENCORP's XP tools always provide the best performance and longest life backed by a 5-year limited warranty.




## Tool Specifications:

Item #: 4Z0001N  
 Tool Weight: 7.4 lbs. (3.4 kg)  
 Height: 11.65" (296 mm)  
 Length: 17.3" (439 mm)  
 Width: 4.5" (114 mm)  
 Collation: 34° strip  
 Capacity: 83 nails  
 Operating Pressure: 70-120 p.s.i.g. (4.8-8.3 bar)  
 Mode of Operation: Selectable trigger mechanism allows either sequential or contact actuation.  
 Air Inlet: 3/8" NPT  
 UPC: 741474061639  
 Packaged Dimension: 21", H: 14.75", L: 5.25", Wt: 8.5 lbs.

## Fastener Specifications:

.113 – .148, Smooth 2" – 3¼", Screw 2 ½" – 3", Ring 2" – 3"  
 GC (.113), HC (.120), KC (.131), (.148)

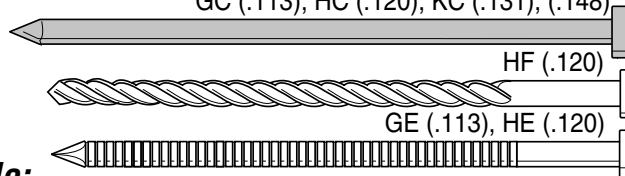

## Nails Available:

### Smooth-Shank

Length	Item Code	Carton Count	Finish
2 x .113	GC21APBKN	5.M	Bright
2 x .113	M002080	2.M	Bright
2 5/8 x .113	GC24APBK	2.5M	Bright
2 5/8 x .113	M002081	2.M	Bright
2 1/2 x .113	GC25APBK	5.M	Bright
3 x .120	HC27APBKN	3.M	Bright
3 x .120	M002023	2.M	Bright
3 x .131	KC27APBK	3.M	Bright
3 x .131	M002018	2.M	Bright
3 1/4 x .120	HC28APBKN	3.M	Bright
3 1/4 x .120	M002024	2.M	Bright
3 1/4 x .131	KC28APBK	3.M	Bright
3 1/4 x .131	M002019	2.M	Bright
2 1/4 x .113	GC23AHAN	1.M	Hardened
2 x .113	GC21AABN	6.7M	Galv
2 5/8 x .113	M002082	2.M	Galv
2 1/2 x .113	GC25AABN	5.M	Galv
3 x .131	KC27AABK	3.M	Galv
3 x .131	KC27AABN	3.M	Galv
3 1/4 x .131	KC28AABK	3.M	Galv
3 1/4 x .131	KC28AABN	3.M	Galv
2 5/8 x .113	GC24ASBK	2.M	Hot Dip
3 x .131	KC27ASBK	2.M	Hot Dip
3 1/4 x .131	KC28ASBK	2.M	Hot Dip
2 5/8 x .113	GC24AGBK	1.M	Stainless
3 x .131	KC27AGBK	1.M	Stainless
3 1/4 x .131	KC28AGBK	1.M	Stainless

### Screw-Shank-Strip

Length	Item Code	Carton Count	Finish
3x.120	HF27EPAN	3.1M	Bright
3x.120	HF27EDB	3.1M	Weatherx™2
3x.120	HF27AGBK	3.1M	Stainless

### Ring-Shank

Length	Item Code	Carton Count	Finish
2 5/8 x .113	GE24APBK	5.M	Bright
2 5/8 x .113	M002078	2.M	Bright
2 5/8 x .113	GE24AABK	2.5M	Galv
2 5/8 x .113	M002079	2.M	Galv
3 x .120	HE27AABKN	2.M	Galv
2x.113	GE21ASBK	2.M	Hot Dip
2 5/8 x .113	GE24ASBK	2.M	Hot Dip
3 x .120	HE27ASBK	2.M	Hot Dip
2x.113	GE21AGBK	1.M	Stainless
3 x .120	HE27AGBK	1.M	Stainless

## Applications:

Framing, sheathing, truss building, sub-flooring and decks. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.

## Features and Benefits:

- Well balanced and lightweight – 7.4 lbs.
- Uses up to 15% less air – Highly efficient internal design
- Reduced jams and mis-feeds – Patented TrueDrive™ magazine
- Easily fits between studs and joists – Low profile design
- Contact or sequential trigger actuation – Patented drive selector

### Unique Features of the SN901XP



**\*Choose the right actuation mode!**

**Sequential Actuation** (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how Senco will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596, or visit our web site at: [www.senco.com](http://www.senco.com).