

### Specifications

Models	GR-26J	
Measurements	US	Metric
Working height*	31 ft 11 in	9.90 m
Platform height	25 ft 11 in	7.90 m
Horizontal reach maximum**	8 ft 3 in	2.51 m
Up-and-over clearance maximum	21 ft 10 in	6.70 m
<b>A</b> Platform length	2 ft 5 in	0.75 m
<b>B</b> Platform width	2 ft 11 in	0.90 m
Toeboard height	6 in	0.15 m
<b>C</b> Height - stowed	6 ft 6 in	1.99 m
<b>D</b> Length - stowed	9 ft 1 in	2.76 m
<b>E</b> Width	3 ft 8.8 in	1.14 m
<b>F</b> Wheelbase	3 ft 11 in	1.20 m
<b>G</b> Ground clearance - center	3.4 in	8.5 cm

### Productivity


Maximum platform occupancy***	2	
Lift capacity	500 lbs	227 kg
Vertical jib rotation	140° (+70°/-70°)	
Turntable rotation	350° non-continuous	
Turntable tailswing	1 in	2.5 cm
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability****	25%	
Turning radius - inside	31 in	0.78 m
Turning radius - outside	92 in	2.30 m
Controls	24V DC proportional	
Drive	dual rear wheel	
Disc brakes	dual rear wheel	
Tires (solid non-marking)	16-5-11 ¼	40.5 cm diam.

### Power


Power source	24 V DC (twelve 2 V batteries, 280 Ah capacity)	
Hydraulic system capacity	4.84 gal	22 L

Weight*****	6,250 lbs	2,835 kg
-------------	-----------	----------

Standards Compliance	ANSI A92.5, CSA B354.4	
----------------------	------------------------	--

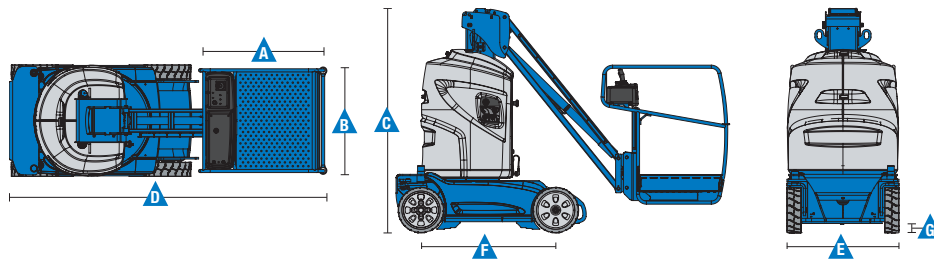

Range Of Motion GR-26J

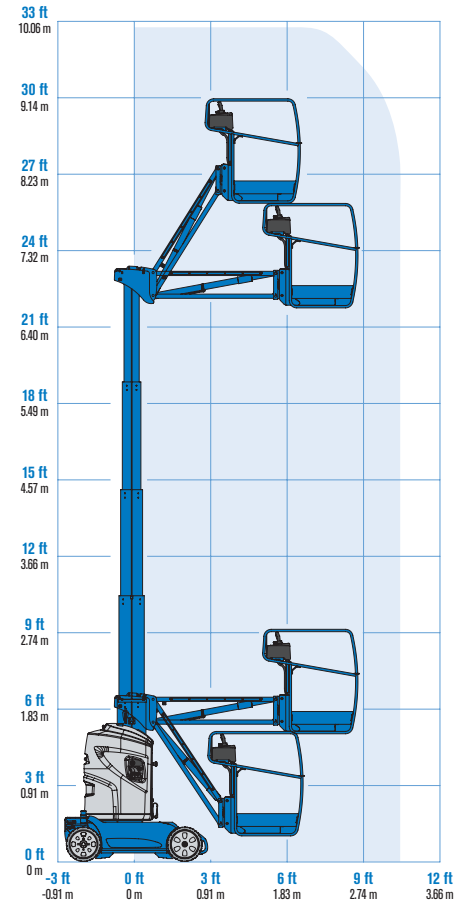

\* The US equivalent of working height adds 6 ft to platform height.

\*\* Non-working reach

\*\*\* ANSI/CSA maximum occupancy is 2 indoor and outdoor.

\*\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\*\* Weight will vary depending on options and/or country standards.

### Features

Standard Features	Standard Features	Options & Accessories
-------------------	-------------------	-----------------------

#### Measurements

##### GR-26J

- 31 ft 10 in (9.90 m) working height
- 8 ft 3 in (2.51 m) horizontal reach
- 21 ft 10.5 in up-and-over reach
- Up to 500 lbs (227 kg) lift capacity
- 4 ft 10 in (1.45 m) jib boom with 140° working range

#### Productivity

- Standard steel platform 2 ft 11 in x 2 ft 5.5 in (0.90 m x 0.75 m) with sliding midrail
- Hydraulic turntable rotation
- Fully proportional lift and drive system
- Drivable at full height
- Low 6 in (15 cm) platform entry height
- Maintenance free rigid steel hydraulic mast
- 44.8 in (1.14 m) compact width
- Low unit height of 6 ft 6 in (1.99 m)
- Low machine weight of 6,250 lbs (2,835 kg)
- Onboard diagnostic system
- AC power to platform
- Direct electric rear wheel drive with electric parking brake
- Front wheel steering
- Brake release switch
- Reinforced ABS chassis covers
- Tie down attachments points
- Overhead crane attachment points
- Non-marking solid tires
- Drive enable system
- Horn
- Hour meter
- Tilt level sensor with audible alarm
- Platform overload sensing
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Motion alarm

#### Power

- Automatic 30 Amp 24 V battery onboard charger
- 24 V DC (twelve 2V, 280 Ah traction batteries)
- Battery charge indicator

#### Options & Accessories

#### Productivity

- Flashing beacon



#### Genie United States

6464 185th Ave. NE  
Redmond, WA 98052  
Telephone +1 (425) 881-1800  
Toll Free in USA/Canada +1 (800)-536-1800  
Fax +1 (425) 883-3475

#### Distributed By:

Effective Date: January, 2017. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie and AWP are registered trademarks of Terex Corporation or its subsidiaries. © 2017 Terex Corporation.