

The ergonomically designed SLS20XP increases quality and productivity in a wide variety of applications.



Applications:

For upholstery operations and varied component assemblies in furniture manufacturing, such as drawers, casebacks, cabinet frame assembly, and upholstery spring attachment. Used in underlayment sheathing, paneling, molding/trim, soffits, pre-finished gypsum, and siding for on-site and manufactured housing, lattice and bed-spring attachment.

Features and Benefits:

- Lightweight (2.5 lbs.) for ease of handling
- Ergonomically designed with a comfort-grip handle to reduce fatigue
- Adjustable depth-of-drive for precise staple setting
- Fewer moving parts for less maintenance and minimal downtime
- No-mar pad keeps work surfaces free of marks
- Oil-free design means easier maintenance and no lubrication to stain fine wood
- Muffler ensures quiet operation

Choose the right trigger system for your specific needs!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.


Tool Specifications:

Item #: SLS20XP-K: 490101N
 SLS20XP-L: 490103N
 SLS20XP-L W/CASE: 490105N
 SLS20XP-M: 490107N
 SLS20XP-R: 490111N

Tool Weight: 2.5 lbs (1.1 kg)
 Height: 8½" (216 mm)
 Length: 12" (305 mm)
 Staple Capacity: 145–168
 Reg. Operating Pressure: 70-120 psig (4.8–8.3 bar)
 Mode of Operation: Contact or Sequential Actuation

Fastener Specifications:

Available Crown Widths 1/4", 3/16", 3/8"
 Lengths: 3/8" – 1-1/2"

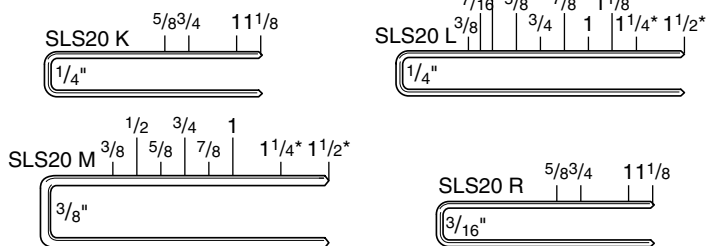

*For soft wood applications only.



Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCO will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596 to find your nearest Authorized Senco Dealer, Distributor or visit our web site at: www.senco.com